Extract from the online catalog

PC 35 HC/ 5-GF-15,00

Order No.: 1762770

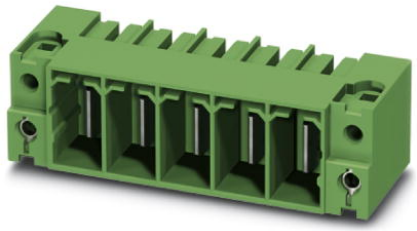

http://eshop.phoenixcontact.net/phoenix/treeViewClick.do?UID=1762770

Header, Nominal current: 125 A, Nom. voltage: 1000 V, Pitch: 15 mm, Number of positions: 5, Color: green, Assembly: Soldering

http://www.download.phoenixcontact.com
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Commercial data	
EAN	4046356441049
Pack	25 pcs.
Customs tariff	85366990
Weight/Piece	0.1171 KG
Catalog page information	Page 442 (CC-2009)

Technical data

Dimensions / positions

Pitch	15 mm
Dimension a	60 mm
Number of positions	5

Technical data

Insulating material group	IIIa
Rated surge voltage (III/3)	8 kV
Rated surge voltage (III/2)	8 kV
Rated surge voltage (II/2)	8 kV
Rated voltage (III/2)	1000 V

Rated voltage (II/2)	1000 V
Nominal current I_N	125 A
Nominal voltage U_N	1000 V
Maximum load current	125 A
Insulating material	PBT
Inflammability class acc. to UL 94	V0

Diagrams/Drawings

Drilling plan/solder pad geometry

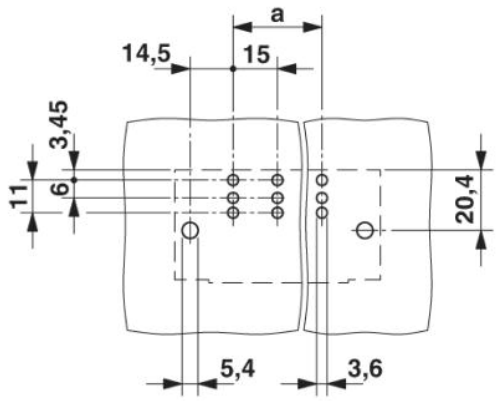

Diagram

Type: PC 35 HC/...-STF-15,00 with PC 35 HC/...-GF-15,00

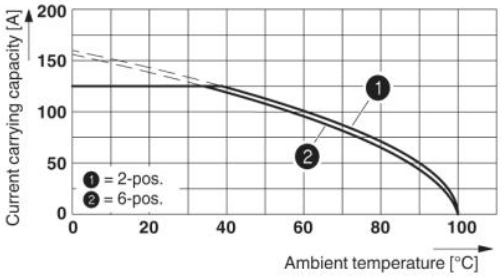

Dimensioned drawing

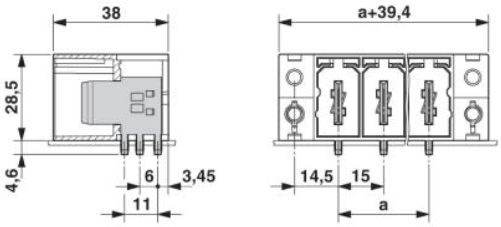

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg,Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
http://www.phoenixcontact.com

© 2010 Phoenix Contact
Technical modifications reserved;